


UTILITIES AND SERVICE REQUIREMENTS

ELECTRICAL	3 PH, 60 HZ, 22 H.P. (16.41 KW) CONNECTED LOAD
STEAM	2" (5.08 CM) FPT 30-80 PSI (206.84-551.58 KPA) 900 LBS/HR (408.23 KG/HR) PEAK FLOW 700 LBS/HR (317.52 KG/HR) AVERAGE FLOW
CONDENSATE	1 1/2" (3.81 CM) FPT
HOT WATER	1 1/2" (3.81 CM) FPT 35 PSI (241.32 KPA) 82.22 DEG C) 380 GALLONS (1438.46 LITERS) /LOAD MAX.
COLD WATER	1" (2.54 CM) FPT 35 PSI (241.32 KPA) 35 GPM (132.49 LITERS/MIN) AVG. FLOW
DRAIN #1	2" (5.08 CM) FPT, 180 DEG F (82.22 DEG C) MAX. 120 GPM (454.25 LITERS/MIN) FLOW
DRAIN #2	2" (5.08 CM) FPT, 180 DEG F (82.22 DEG C) MAX. 120 GPM (454.25 LITERS/MIN) FLOW
EXHAUST	12" (30.48 CM) DIA, 180 DEG F (82.22 DEG C) SATURATED 600 SCFM (16.99 CUBIC METERS/MIN) FLOW EACH (2 PLACES)

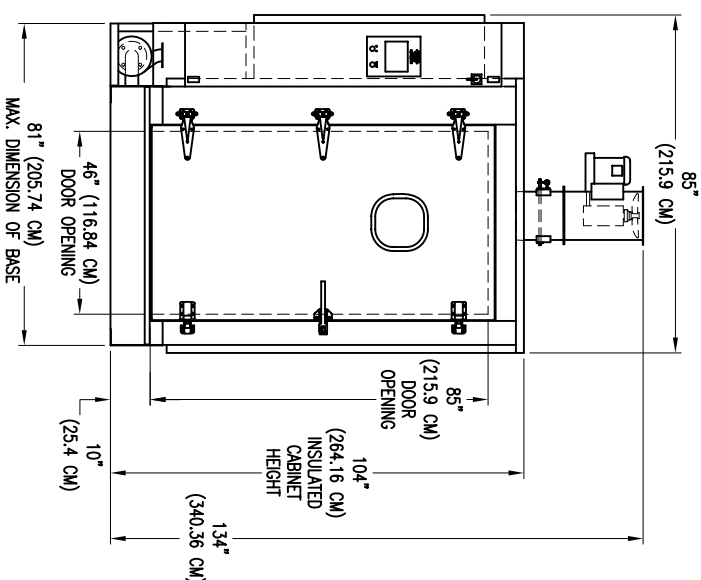

NOTICE: All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Schlyer Machine. Any disclosure or use thereof not authorized in writing by Schlyer Machine is unlawful and will be prosecuted to the full extent of the law.

DWG. BY: JBR/KE DATE: 7/28/05
 APP. BY: DATE:
 SCALE: 1=24 JOB NO.:
 SHEET: OF: NEXT ASH:

DRAWING TITLE: 62900L LH CAGE AND RACK WASHER DRAWING
 PART NO.: 62900L LH
 200 DAVE ST. WILSON, NY 14172