


UTILITIES AND SERVICE REQUIREMENTS

- ELECTRICAL 208/360/480 3 PH, 60 HZ, CONNECTED 8 H.P. (5.97 KW) LOAD
- ELECTRIC HEAT 208/360/480 3 PH, 60 HZ, 24 KW
- (OPTIONAL)
- STEAM 1 1/2" (3.81 CM) FPT 30-80 PSI (206.84-551.58 KPA)
- 400 LBS/HR (181.44 KG/HR) PEAK FLOW RATE
- 300 LBS/HR (136.08 KG/HR) AVERAGE FLOW RATE
- CONDENSATE 1" (2.54 CM) FPT
- HOT WATER 1" FPT (2.54 CM) 35 PSI (241.32 KPA) 180 DEG. F. (82.22 DEG C)
- 90 GALLONS (340.69 LITERS) MAX. / LOAD CONSUMPTION
- COLD WATER 3/4" (1.91 CM) FPT 35 PSI (241.32 KPA) 50 DEG. F. (10 DEG C)
- 15 GPM (56.78 LITERS/MIN) AVERAGE FLOW
- 1 1/2" (3.81 CM) FPT 190 DEG. F. (87.78 DEG C) MAX. TEMPERATURE
- 60 GPM (227.12 LITERS/MIN) FLOW RATE
- EXHAUST 6" (15.24 CM) DIA. 180 DEG. F. (82.22 DEG C) SATURATED
- 200 CFM (5.66 CUBIC METERS/MIN) FLOW RATE
- COMPRESSED AIR 1/2" (1.27 CM) FPT 80 PSI (551.58 KPA)
- 4 SCFM (0.11 CUBIC METERS/MIN) FLOW RATE

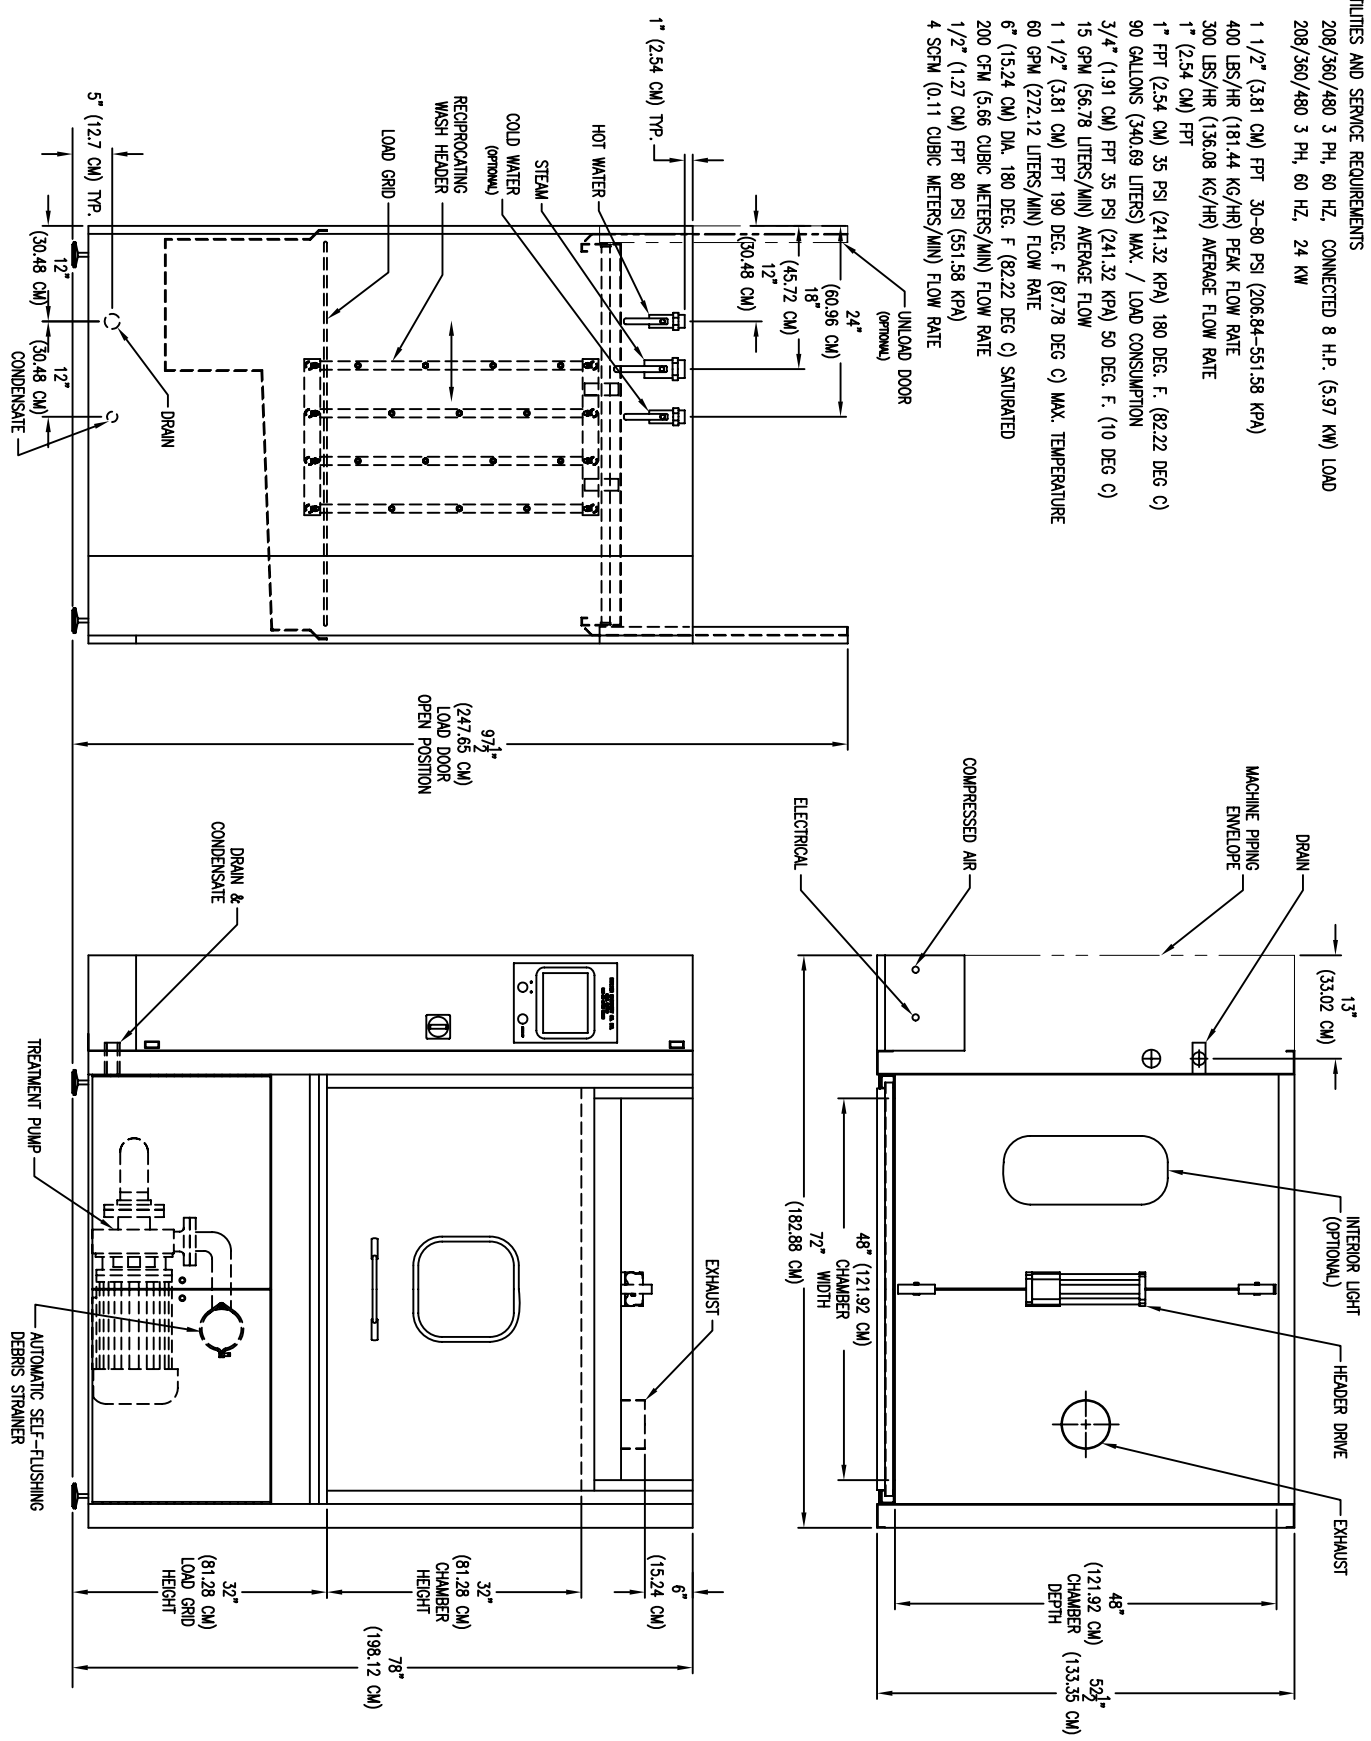

NOTICE: All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Schlyer Machinery. Any disclosure or use thereof not authorized in writing by Schlyer Machinery is unlawful and will be prosecuted to the full extent of the law.

| | | |
|-----------------------|---------------|----------------------------------------------------------|
| DWG BY: GREG B | DATE: 2/28/06 | DRAWING TITLE: MODEL GBW 1026L LH CAGE AND BOTTLE WASHER |
| APP BY: | DATE: | PART NO: GBW1026L LH |
| SCALE: 1" = 1' | JOB NO: | |
| SHEET: 1 OF 1 | NEXT ASHB: | |
| SCHLYER MACHINERY CO. | | 200 LAKE ST. WILSON, NY 14172 |