

UTILITIES AND SERVICE REQUIREMENTS

ELECTRICAL  
208/360/480 3 PH, 60 HZ  
8 H.P. (5.97 KW) CONNECTED LOAD

ELECTRIC HEAT (OPTIONAL)  
208/360/480 3 PH, 60 HZ, 24 KW

STEAM  
1 1/2" (3.81 CM) FPT 30-80 PSI (206.84-551.58 KPA)

CONDENSATE  
350 LBS/HR (158.76 KG/HR) PEAK FLOW RATE  
250 LBS/HR (113.40 KG/HR) AVERAGE FLOW RATE

HOT WATER  
1" (2.54 CM) FPT

COLD WATER (OPTIONAL)  
1" (2.54 CM) FPT 35 PSI (241.32 KPA) 180 DEG. F. (82.22 DEG C) 90 GALLONS (340.69 LITERS) MAX. / LOAD CONSUMPTION




DRAIN  
3/4" (1.91 CM) FPT 35 PSI (241.32 KPA) 50 DEG. F. (10 DEG C) 15 GPM (56.78 LITERS/MIN) AVERAGE FLOW RATE

EXHAUST  
1 1/2" (3.81 CM) FPT 190 DEG. F. (87.78 DEG C) MAX. TEMPERATURE 60 GPM (227.12 LITERS/MIN) FLOW RATE

COMPRESSED AIR  
6" (15.24 CM) DIA. 180 DEG. F. (82.22 DEG C) SATURATED 200 CFM (5.66 CUBIC METERS/MIN) FLOW RATE

1/2" (1.27 CM) FPT 80 PSI (551.59 KPA) 4 SCFM (0.11 CUBIC METERS/MIN) FLOW RATE

1" (2.54 CM) TYP.

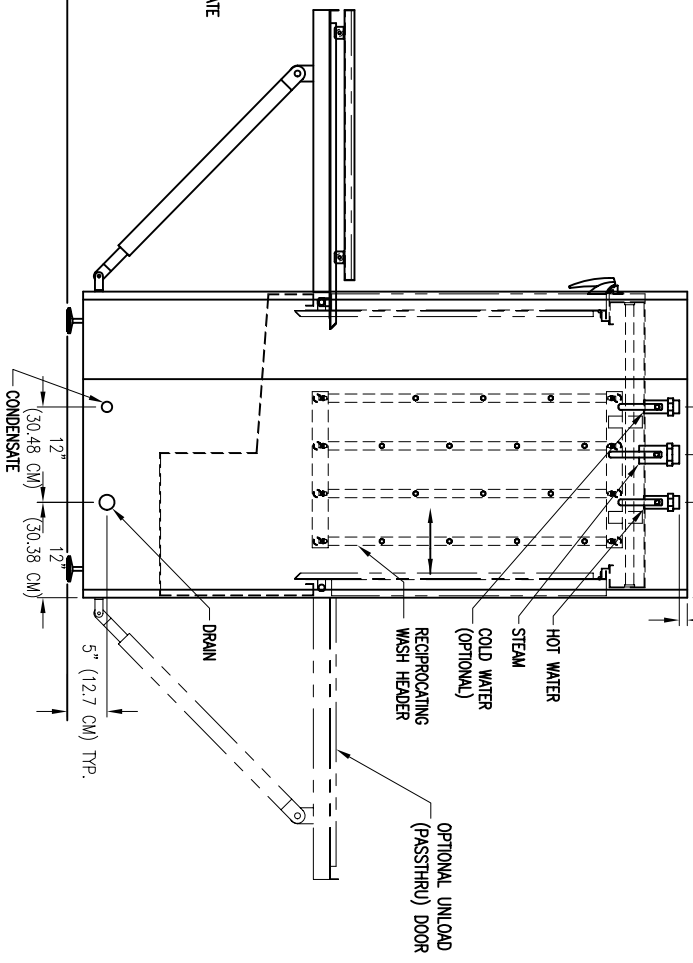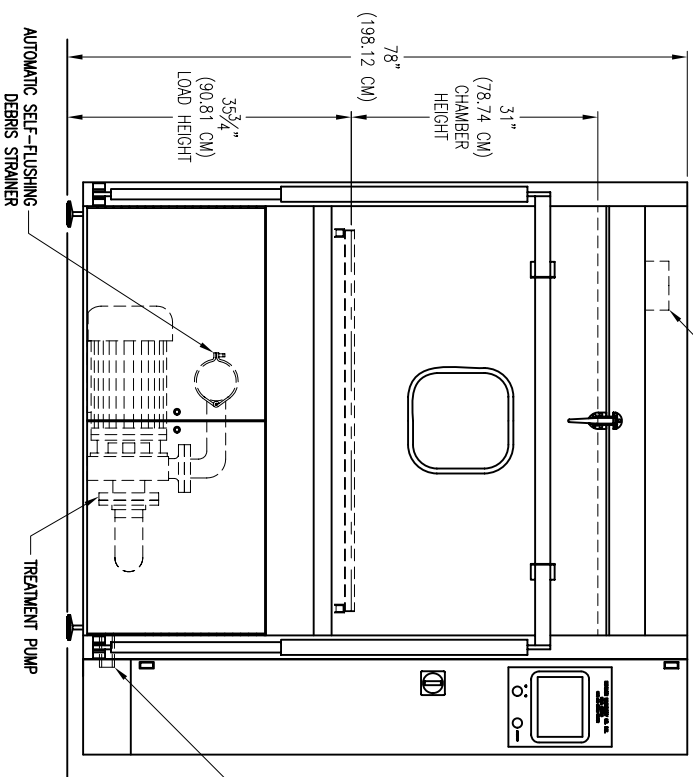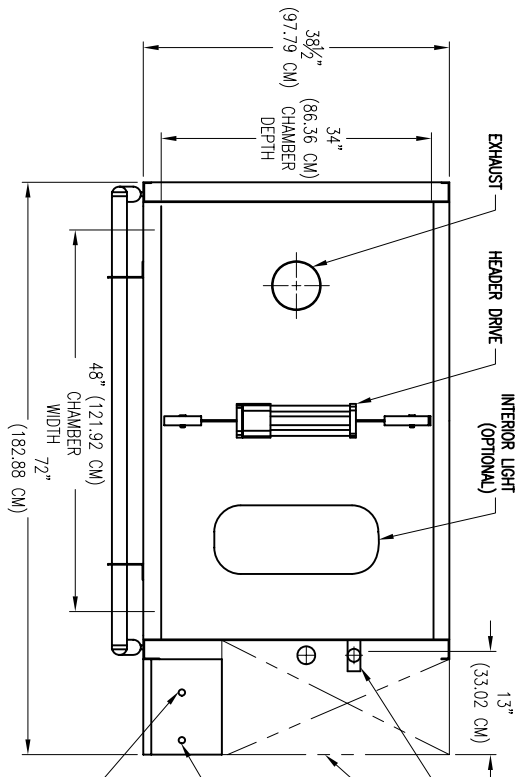

NOTE: All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Schlyer Machine. Any disclosure or use thereof not authorized in writing by Schlyer Machine is unlawful and will be prosecuted to the full extent of the law.

DWG. BY: GREG B	DATE: 2/28/05
APP. BY:	DATE:
SCALE:	JOB NO.:
SHEET: 1 OF 1	NEXT ASH.:

DRAWING TITLE:	PART NO.:
MODEL: CBW1026LS RH CAGE AND BOTTLE WASHER	
SCHLYER MACHINERY CO.	CBW1026LS R
200 LAKE ST. WILSON, NY 14172	