
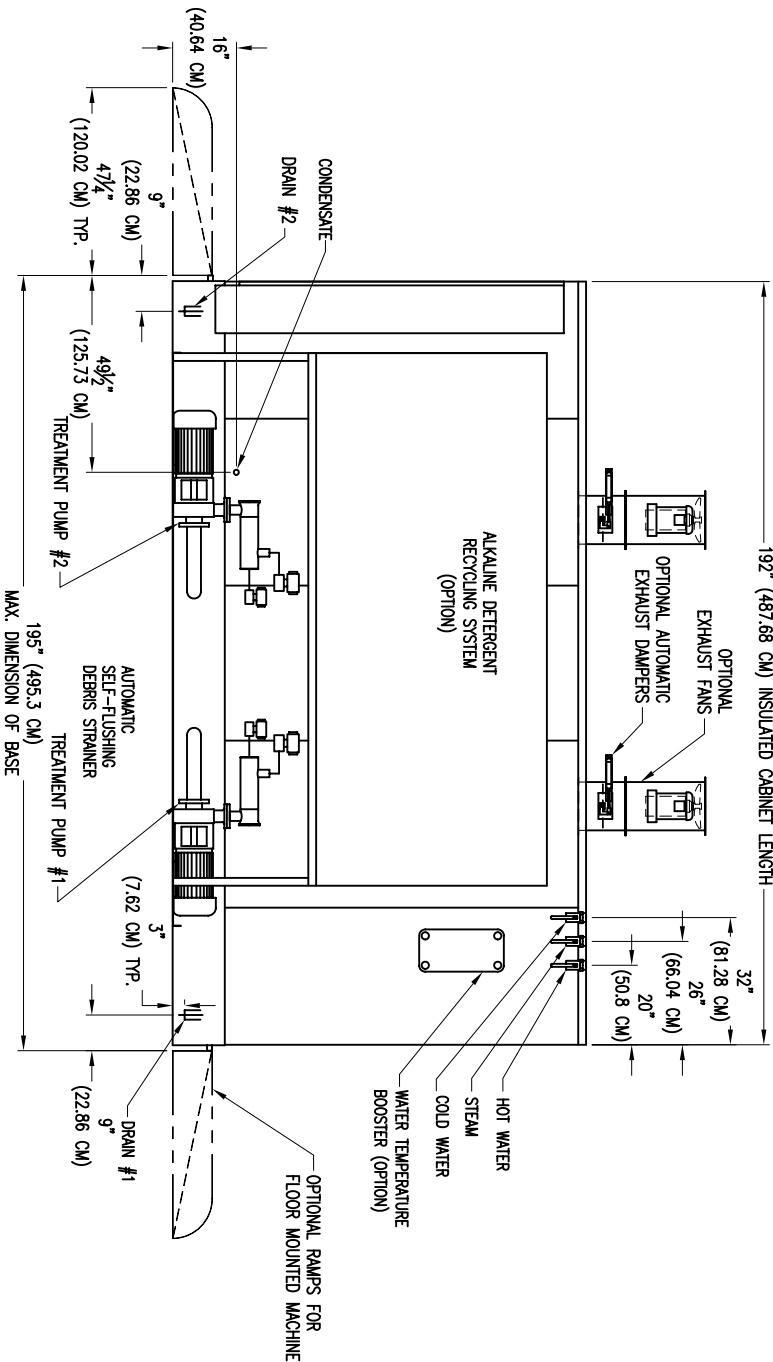
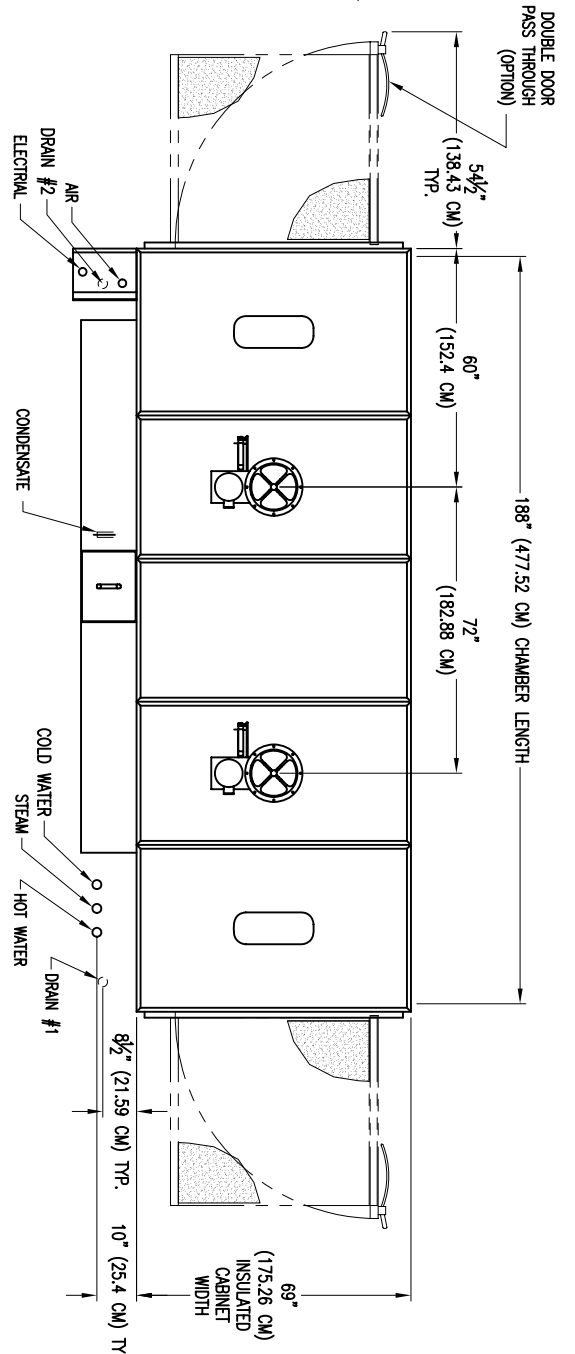


UTILITIES AND SERVICE REQUIREMENTS

- ELECTRICAL 3 PH, 60 HZ, 22 H.P. (16.41 KW) CONNECTED LOAD
- STEAM 2" (5.08 CM) FPT 30-80 PSI (206.84-551.58 KPA)
- CONDENSATE 900 LBS/HR (408.23 KG/HR) PEAK FLOW
- HOT WATER 700 LBS/HR (317.52 KG/HR) AVERAGE FLOW
- COLD WATER 1 1/2" (3.81 CM) FPT
- DRAIN #1 82.22 DEG C) 380 GALLONS (1438.46 LITERS) / LOAD MAX.
- DRAIN #2 1" (2.54 CM) FPT 35 PSI (241.32 KPA)
- EXHAUST 35 GPM (132.49 LITERS/MIN) AVG. FLOW
- 2" (5.08 CM) FPT, 180 DEG F (82.22 DEG C) MAX.
- 120 GPM (454.25 LITERS/MIN) FLOW
- 2" (5.08 CM) FPT, 180 DEG F (82.22 DEG C) MAX.
- 120 GPM (454.25 LITERS/MIN) FLOW
- 12" (30.48 CM) DIA. 180 DEG F (82.22 DEG C) SATURATED
- 600 SCFM (16.99 CUBIC METERS/MIN) FLOW EACH

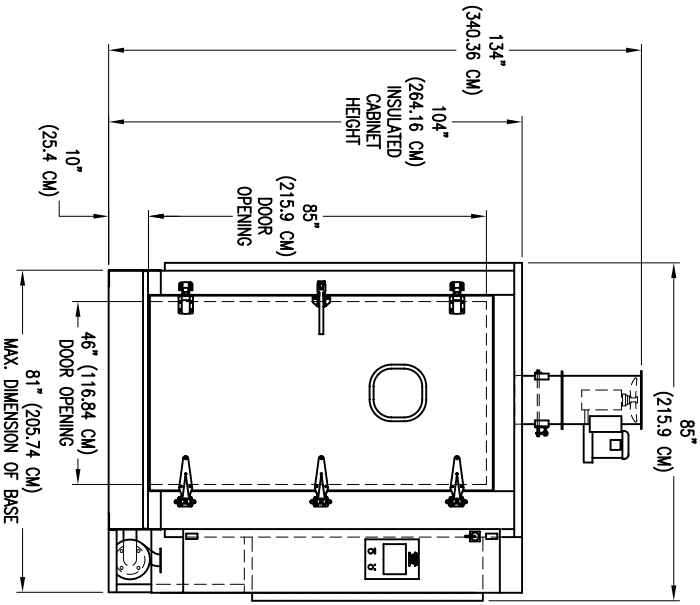

NOTE: All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Schlyer Machine. Any disclosure or use thereof not authorized in writing by Schlyer Machine is unlawful and will be prosecuted to the full extent of the law.

DMN BR: JBRKE DATE: 7/28/05
 APR BR: DATE:
 SCALE: 1=24 JOB NO:
 SHEET: OF: NEXT ASMB:

DRAWING TITLE:
 62900L RH CAE AND RACK WASHER DRAWING
 SCHLYER MACHINERY CO. PART NO:
 200 LAKE ST. WILSON, NY 14172 62900DL RH