


UTILITIES AND SERVICE REQUIREMENTS
 MODEL GM1020G-E ELECTRIC HEAT

ELECTRICAL	3 PH, 60 HZ, 10 KW
HOT WATER	3/4" (1.91 CM) NPT 35 PSI (241.32 KPA) 130 DEG. F. (54.44 DEG C) 38 GALLONS (143.85 LITERS) MAX. / LOAD CONSUMPTION
DRAIN	1 1/2" (3.81 CM) NPT 190 DEG. F. (87.78 DEG C) MAX. TEMPERATURE 30 GPM (113.56 LITERS/MIN) FLOW RATE
EXHAUST	4" (10.16 CM) DIA. 200 CFM (5.66 CUBIC METERS/MIN) FLOW RATE
PURE WATER	3/4" (1.91 CM) NPT

MODEL GM1020G-S STEAM HEAT

ELECTRICAL	3 PH, 60 HZ, 4 KW
STEAM	1" (2.54 CM) NPT 30-50 PSI (206.84-344.74 KPA) 250 LBS/HR (113.4 KG/HR) PEAK FLOW RATE
CONDENSATE	3/4" (1.91 CM) NPT
HOT WATER	3/4" (1.91 CM) NPT 35 PSI (241.32 KPA) 130 DEG. F. (54.44 DEG C) 38 GALLONS (143.85 LITERS) MAX. / LOAD CONSUMPTION
DRAIN	1 1/2" (3.81 CM) NPT 190 DEG. F. (87.78 DEG C) MAX. TEMPERATURE 30 GPM (113.56 LITERS/MIN) FLOW RATE
EXHAUST	4" (10.16 CM) DIA. 200 CFM (5.66 CUBIC METERS/MIN) FLOW RATE
PURE WATER	3/4" (1.91 CM) NPT

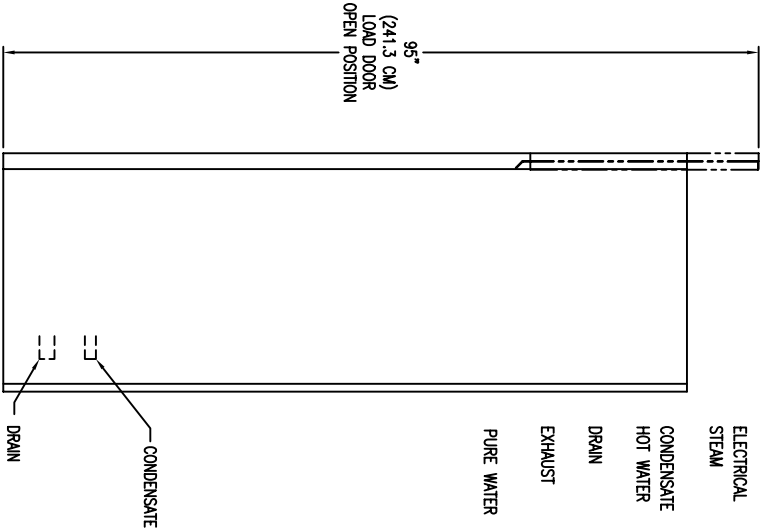

NOTICE: All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Schlyer Machinery. Any disclosure or use thereof not authorized in writing by Schlyer Machinery is unlawful and will be prosecuted to the full extent of the law.

DWN BY: S. CASSIDY APR 81: _____ SCALE: 1"=1'-0" SHEET: ____ OF: ____	DATE: 01-27-04 JOB NO: _____ NEXT ASBK: _____	DRAWING TITLE: MODEL GM1020-G GLASSWARE WASHER SCHLYER MACHINERY CO. 200 LAKE ST. WILSON, NY 14172	PART NO: GW-10001C
--	---	---	-----------------------