


UTILITIES AND SERVICE REQUIREMENTS
MODEL GMD1022G-E ELECTRIC HEAT

ELECTRICAL	3 PH, 60 HZ, 14 KW
HOT WATER	3/4" (1.91 CM) NPT 35 PSIG (241.32 KPA) 130 DEG. F. (54.44 DEG. C) 38 GALLONS (143.85 LITERS) MAX. / LOAD CONSUMPTION
DRAIN	1 1/2" (3.81 CM) NPT 190 DEG. F. (87.78 DEG. C) MAX. TEMPERATURE 30 GPM (113.56 LITERS/MIN) FLOW RATE
EXHAUST	4" (10.16 CM) DIA. 200 CFM (5.66 CUBIC METERS/MIN) FLOW RATE
PURE WATER	3/4" (1.91 CM) NPT

MODEL GMD1022G-S STEAM HEAT

ELECTRICAL	3 PH, 60 HZ, 8 KW
STEAM	1" (2.54 CM) NPT 30-50 PSI (206.84-344.74 KPA) 250 LBS/HR (113.4 KG/HR) PEAK FLOW RATE
CONDENSATE	3/4" (1.91 CM) NPT
HOT WATER	38 GALLONS (143.85 LITERS) MAX. / LOAD CONSUMPTION
DRAIN	1 1/2" (3.81 CM) NPT 190 DEG. F. (87.78 DEG. C) MAX. TEMPERATURE 30 GPM (113.56 LITERS/MIN) FLOW RATE
EXHAUST	4" (10.16 CM) DIA. 200 CFM (5.66 CUBIC METERS/MIN) FLOW RATE
PURE WATER	3/4" (1.91 CM) NPT

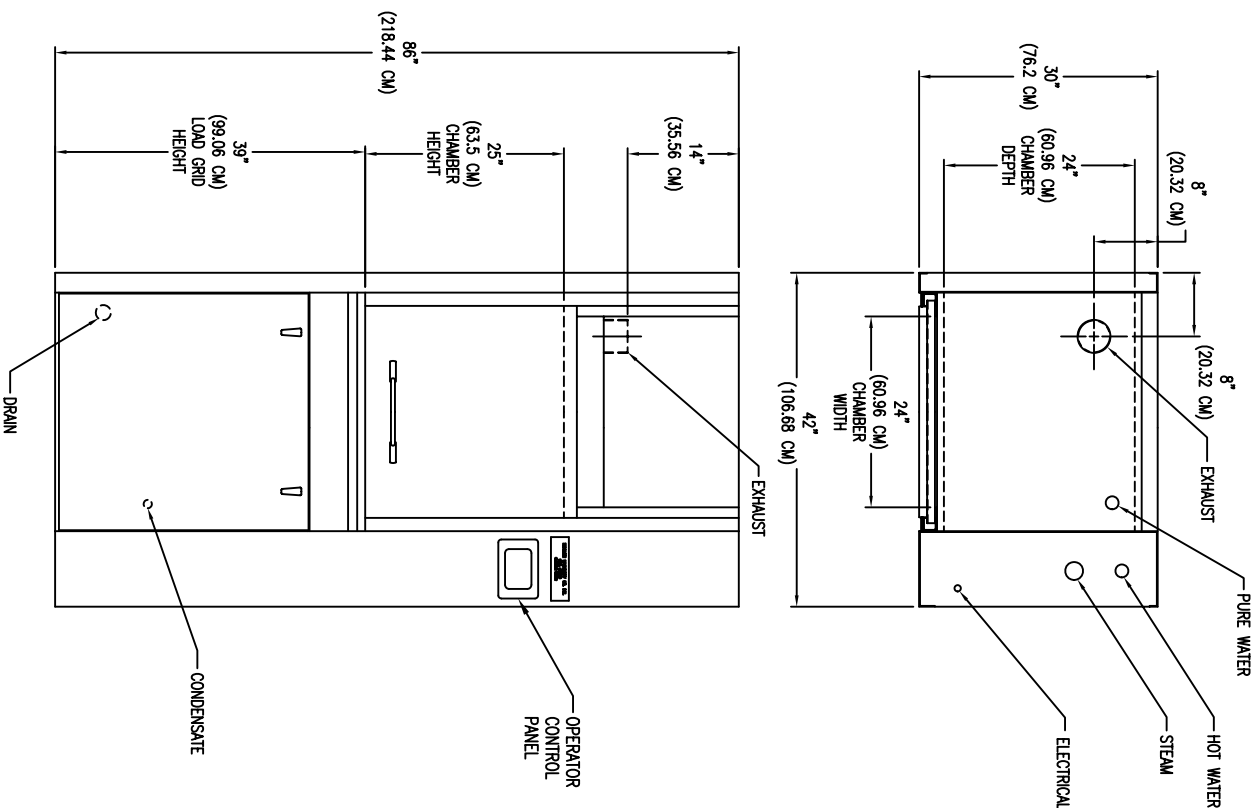

NOTICE: All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Schlyer Machine. Any disclosure or use thereof not authorized in writing by Schlyer Machine is unlawful and will be prosecuted to the full extent of the law.

DWM BR: S. DASSBY APR BR: _____ SCALE: 1"=1'-0" SHEET: ____ OF ____ DATE: 02-25-04 DATE: _____ JOB NO: _____ NEXT ASBK: _____	DRAWING TITLE: MODEL GMD1022-G GLASSWARE WASHER/DRYER SCHLYER MACHINERY CO. 206 LAKE ST. WILSON, NY 14172	PART NO: GMD-10001C
----------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------	------------------------